


# PSVH2-50

Closed-circuit Piston Pump  
閉回路製品向けピストンポンプ

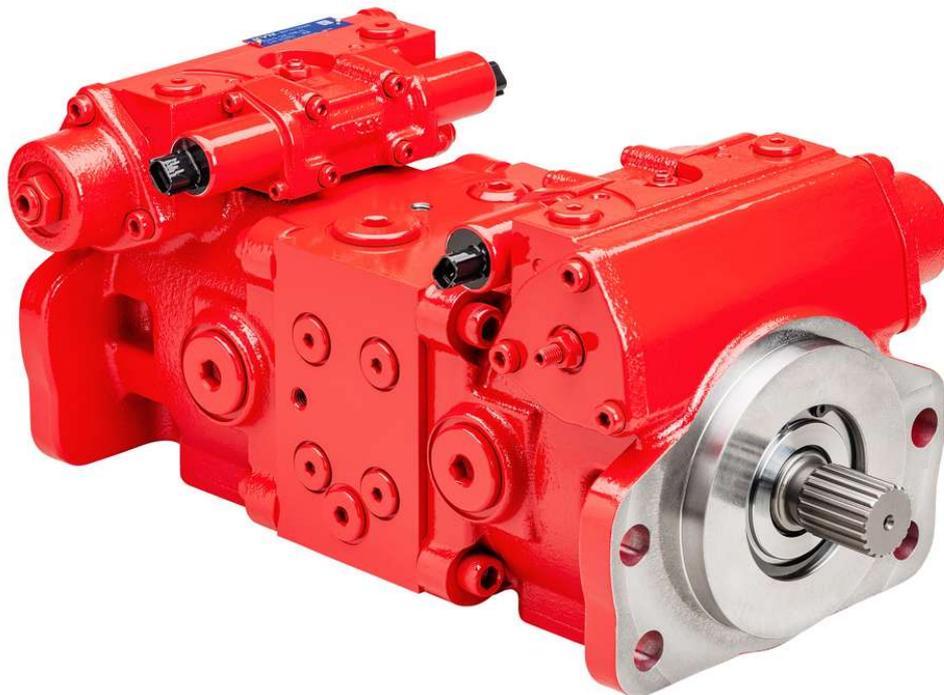

Reference  
Exhibit

※Under Planning

## Features 特徴

- Compact and lightweight
- Built-in charge pump and relief valve
- Variety of options
  - Can be equipped with a high pressure Gear-Pump for the power source for auxiliary attachments
  - Swashplate Operation Method
    - (New) Electric proportional control
    - Hydraulic direct control

## Specifications 仕様

- For Closed-circuit system  
閉回路製品用
- Max. displacement:  
2×51.0cm<sup>3</sup>/rev  
最大容積
- Max. pressure (Δp) :35.0MPa  
最高有効圧力
- Rated input speed:3,000rpm  
最高入力回転数

Currently in the planning stage,  
specifications may change significantly

**KYB**

Our Precision, Your Advantage